

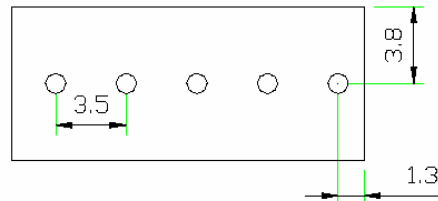
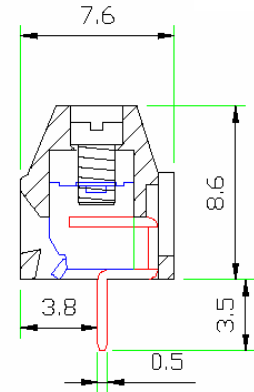


Pos.	A	B
2	7.0	3.5
3	10.5	7.0
4	14.0	10.5
5	17.5	14.0
6	21.0	17.5
7	24.5	21.0
8	28.0	24.5
9	31.5	28.0
10	35.0	31.5
11	38.5	35.0
12	42.0	38.5
13	45.5	42.0
14	49.0	45.5
15	52.5	49.0
16	56.0	52.5
17	59.5	56.0
18	63.0	59.5
19	66.5	63.0
20	70.0	66.5
21	73.5	70.0
22	77.0	73.5
23	80.5	77.0
24	84.0	80.5
25	87.5	84.0
26	91.0	87.5
27	94.5	91.0
28	98.0	94.5

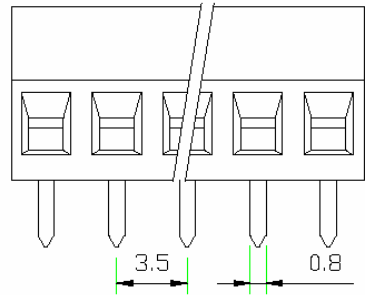

SPECIFICATIONS

Current rating: 10 amps
Voltage rating: 300VAC
Terminals: Brass, tin plated
Material: Thermoplastic, UL94V-0
Insulation resistance: 500 megohms min. at 500VDC
Screw material: Steel
Screw plating: Zinc
Withstanding: 1,500VAC for 1 min.

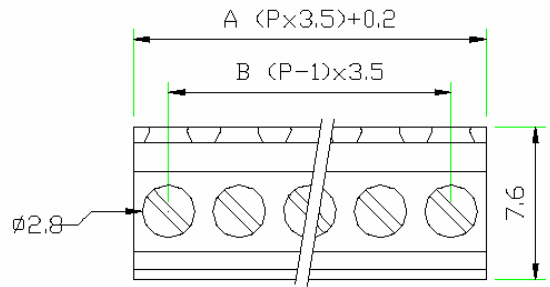

Series	Type	Pitch	Positions	Color
CMTB	HD351	350	XX	GN
Terminal block	PCB mount type	350=3.50mm	2-28	GN=Green (std) BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HD351-350-XX-GN**

Description: Terminal block, female, 3.50mm pitch