


SECTION A-A

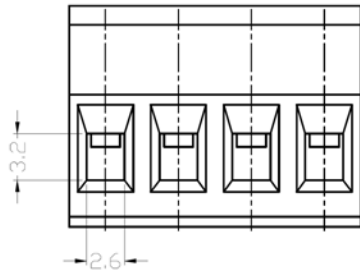

SPECIFICATIONS

Contact Material:	Phosphor Bronze
Screws:	M2.5 Steel Zinc Plated
Housing:	PA66, UL94V-0
Voltage Rating:	300V
Current Rating:	12A
Contact Resistance:	20mΩ
Insulation Resistance:	5000MΩ/1000V
Withstanding Voltage:	AC1500V/1min
Wire Range:	14-24AWG 1mm ²
Max Soldering:	+250C for 5 sec.
Torque:	0.5Nm (4.5LB. In)
Strip Length:	7-8mm
Temp Range:	-40C to +105C

Series	Type	Pitch	Positions	Color
CMTB	HD515HA	XXX	XX	XX
Terminal block	Wire mount type	500=5.00mm 508=5.08mm (.200")	2-24	GN=Green BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/11/05
				Checked	Lizzy	07/11/05
				Drawn	Tina	07/11/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HD515HA-508-XX-XX**

Description: Terminal block, female, 5.08mm pitch