
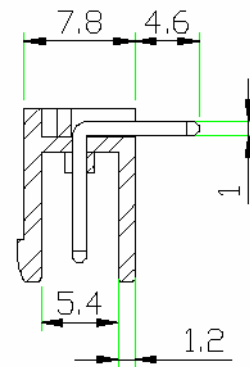
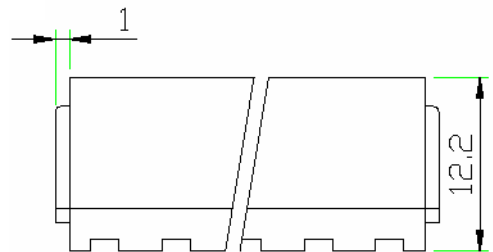


Pos.	A	B
2	12.16	5.08
3	17.24	10.16
4	22.32	15.24
5	27.40	20.32
6	32.48	25.40
7	37.56	30.48
8	42.64	35.56
9	47.72	40.64
10	52.80	45.72
11	57.88	50.80
12	62.96	55.88
13	68.04	60.96
14	73.12	66.04
15	78.20	71.12
16	83.28	76.20
17	88.36	81.28
18	93.44	86.36
19	98.52	91.44
20	101.60	96.52
21	108.68	101.60
22	113.76	106.68

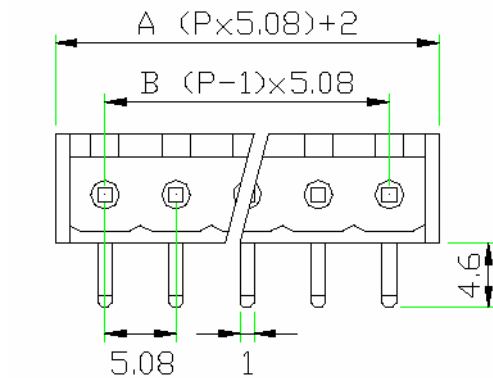

SPECIFICATIONS

Current rating: 12 amps
Voltage rating: 250VAC
Terminal material: Brass
Terminal plating: Tin
Housing material: Thermoplastic, UL94V-0, green
Insulation resistance: 500 megohms min. at 500VDC
Screw material: Steel
Screw plating: Nickel
Withstanding: 2000VAC

Series	Type	Pitch	Positions	Color
CMTB	HD515RC	XXX	XX	GN
Terminal block	Right angle, closed ends	500=5.00mm 508=5.08mm (.200")	2-22	GN=Green

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HD515RC-508-XX-XX**

Description: Terminal block, male, 5.08mm pitch, right-angle, closed ends