

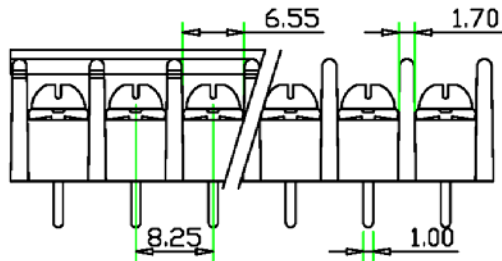


SPECIFICATIONS

Terminal Material: Tin w/ Brass Plating
 Screw Material: M3.0 Nickel Plated Steel
 Body Material: Polyamide 66(UL94V-0) Black
 Insulation Resistance: 1000MΩ min.
 Wire Range: 14~18 AWG
 Rating: 20 Amp AC300V
 Cover: PC Transparent
 Withstanding: AC 2000V min

| Dimensions | | | | | |
|------------|--------|--------|------|--------|--------|
| Pole | A | B | Pole | A | B |
| 2 | 18.50 | 08.25 | 16 | 134.00 | 123.75 |
| 3 | 26.75 | 16.50 | 17 | 142.25 | 132.00 |
| 4 | 35.00 | 24.75 | 18 | 150.50 | 140.25 |
| 5 | 43.25 | 33.00 | 19 | 158.75 | 148.50 |
| 6 | 51.50 | 41.25 | 20 | 167.00 | 156.75 |
| 7 | 59.75 | 49.50 | 21 | 175.25 | 165.00 |
| 8 | 68.00 | 57.75 | 22 | 183.50 | 173.25 |
| 9 | 76.25 | 66.00 | 23 | 191.75 | 181.50 |
| 10 | 84.50 | 74.25 | 24 | 200.00 | 189.75 |
| 11 | 92.75 | 82.50 | 25 | 208.25 | 198.00 |
| 12 | 101.00 | 90.75 | 26 | 216.50 | 206.25 |
| 13 | 109.25 | 99.00 | 27 | 224.75 | 214.50 |
| 14 | 117.50 | 107.25 | 28 | 233.00 | 222.75 |
| 15 | 125.75 | 115.50 | 29 | 241.25 | 231.00 |
| | | | 30 | 249.50 | 239.25 |

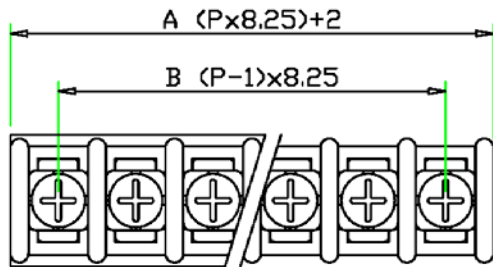

Other Pin Styles Available

| Series | Type | Pitch | Positions | Color |
|----------------|---|------------|-----------|----------|
| CMTB | HD816X | 825 | XX | BK |
| Terminal Block | X= Blank: No Flange F: Mounting Flange C: Cover L: Long Tail 13.5mm R: Right Angle | 825=8.25mm | 02-30 | BK=Black |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 6/30/08 |
| | | | | Checked | Lizzy | 6/30/08 |
| | | | | Drawn | Tina | 6/30/08 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HD816-825-XX-BK**

Description: Barrier Type Terminal Block