



SPECIFICATIONS

Voltage rating: 250VAC
 Current rating: 10 amps
 Housing material: Thermoplastic, UL94V-0
 Terminal material: Brass
 Terminal plating: Tin
 Screw material: Steel
 Screw plating: Nickel
 Wire range: 14 to 22AWG stranded
 Withstanding: 2,000VAC
 Insulation resistance: 500 megohms min. at 500VDC

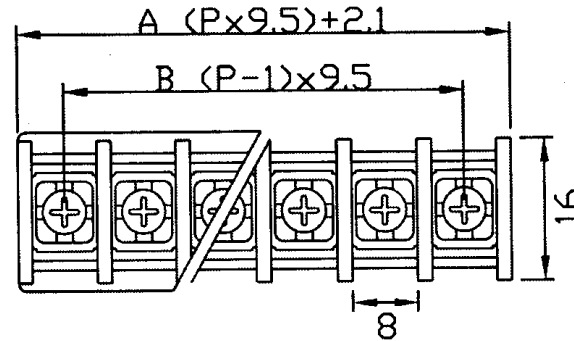

| Dimensions | | | | | | | | |
|------------|-------|-------|------|-------|-------|------|-------|-------|
| Pos. | A | B | Pos. | A | B | Pos. | A | B |
| 2 | 21.1 | 9.5 | 13 | 125.6 | 114.0 | 24 | 230.1 | 218.5 |
| 3 | 30.6 | 19.0 | 14 | 135.1 | 123.5 | 25 | 239.6 | 228.0 |
| 4 | 40.1 | 28.5 | 15 | 144.6 | 133.0 | 26 | 249.1 | 237.5 |
| 5 | 49.6 | 38.0 | 16 | 154.1 | 142.5 | 27 | 258.6 | 247.0 |
| 6 | 59.1 | 47.5 | 17 | 163.6 | 152.0 | 28 | 268.1 | 256.5 |
| 7 | 68.6 | 57.0 | 18 | 173.1 | 161.5 | 29 | 277.6 | 266.0 |
| 8 | 78.1 | 66.5 | 19 | 182.6 | 171.0 | 30 | 287.1 | 275.5 |
| 9 | 87.6 | 76.0 | 20 | 192.1 | 180.5 | 21 | 296.6 | 285.0 |
| 10 | 97.1 | 86.5 | 21 | 201.6 | 190.0 | 22 | 306.1 | 294.5 |
| 11 | 106.6 | 95.0 | 22 | 211.1 | 199.5 | | | |
| 12 | 116.6 | 104.5 | 23 | 220.6 | 209.0 | | | |

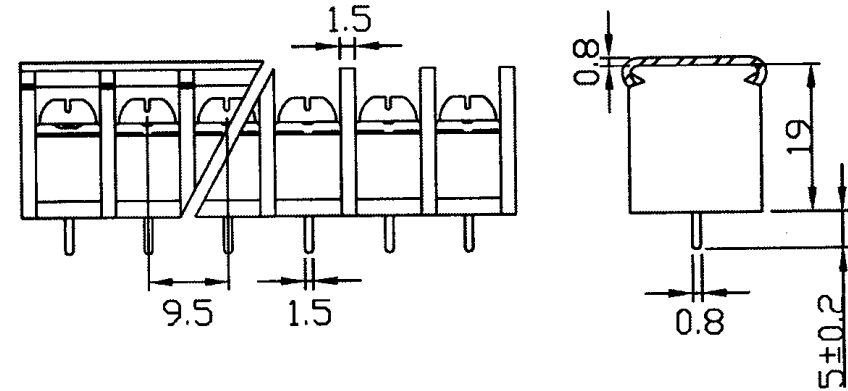

| Series | Type | Pitch | Positions | Color |
|----------------|---|-------------------------------------|-----------|----------|
| CMTB | HI201X | XXX | XX | BK |
| Terminal Block | Barrier Strip with Mounting Flange Add "C" for Cover (19 Pos. Max) | 950=9.5mm 1100=11mm 1400=14mm | 02-22 | BK=Black |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 08/10/99 |
| | | | | Checked | Lizzy | 08/10/99 |
| | | | | Drawn | Tina | 08/10/99 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HI201X-950-XX**

Description: Barrier strip, 9.5mm pitch, straight PCB mount