
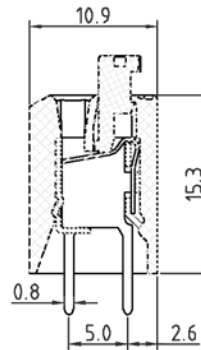


N=Number of contacts

PCB. LAYOUT



SPECIFICATIONS

Voltage Rating: 300VAC
 Current Rating: 10A
 Solder Pin Material: Brass, Tin Plating
 Wire Protectors: Stainless Steel
 Insulation Material: Polyamide UL94V-0
 Insulation Resistance: 500MΩ at DC 500V
 Wire Range: 16-20 AWG
 Withstanding: AC 1500V
 Temperature Range: -40°C to +105°C
 Soldering Temp.: +250°C, 5 Seconds Max

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	10/21/03
				Checked	Lizzy	10/21/03
				Drawn	Tina	10/21/03
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HV-381-XX-XX**

Description: Terminal Block