


**SPECIFICATIONS**

- 24 Positions
- Current Rating: 15A
- Voltage Rating: 300V
- A Length: 500XP(P≥2)
- Housing Material: PA 66 UL94V-0
- Pin Dimensions: Brass, Tin Plated
- PCB Hole: 1.5mm Diameter
- Withstanding: 10A
- Operating Temp: -40°C to +105°C

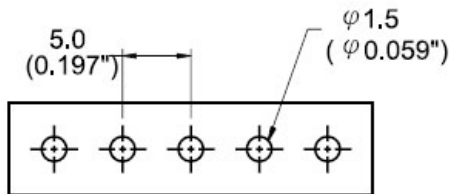

PCB Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/11/09
				Checked	Lizzy	12/11/09
				Drawn	Tina	12/11/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-M0022-500-XX-BK**

Description: Header 5.00mm Pitch