





# PCB Layout

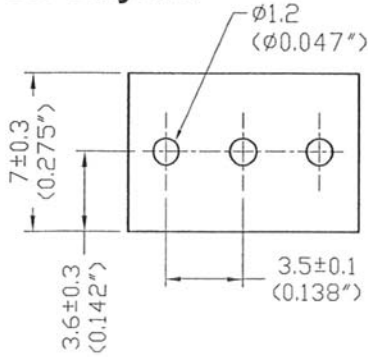

Item	Name	Material	Finish
1	Insulating Body	Polyamide 66 UL94V-0	Black
2	Terminal	Brass	Tin Plated
3	Wire Protector	Phosphor Bronze	Tin Plated
4	Screw	Steel	Zinc Plated

## SPECIFICATIONS

Current Rating: 6Amp AC300V  
 Insulation Resistance: >2000MΩ DC500V  
 Wire Strip Length: 4mm~5mm  
 Wire Range: 16~26 AWG  
 Screw Torque: 2.5 lb-inch  
 Withstanding: AC2000V min  
 Operating Temp: -33C to +105C

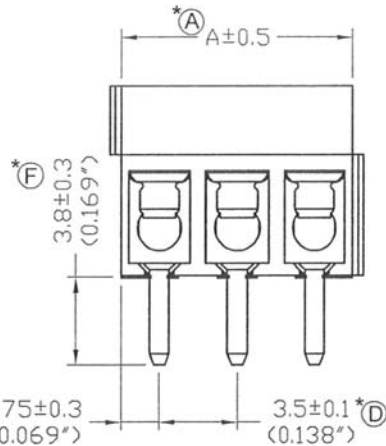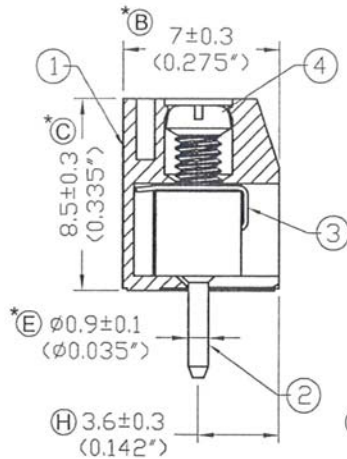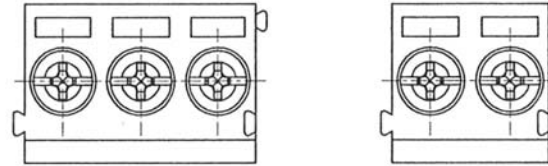

Dimensions			
Poles	A	Poles	
2	7.00	15	52.50
3	10.50	16	56.00
4	14.00	17	59.50
5	17.50	18	63.00
6	21.00	19	66.50
7	24.50	20	70.00
8	28.00	21	73.50
9	31.50	22	77.00
10	35.00	23	80.50
11	38.50	24	84.00
12	42.00	25	87.50
13	45.50		
14	49.00		

Series	Type	Pitch	Poles	Color
CMTB	MA212M	350	XX	XX
Terminal Block	Side entry top screw modular	350=3.50mm pitch	02 & 03 Poles Modular	BK=Black GN=Green

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/20/12
				Checked	Lizzy	02/20/12
				Drawn	Tina	02/20/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MA212M-350-XX-BK**

Description: Terminal Block, Side Entry, Top Screw, Modular