
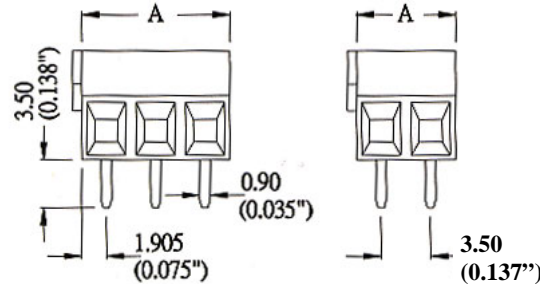



PCB Layout

Item	Name	Material	Finish
1	Insulating Body	Polyamide 66(UL94V-0)	Ni Plated
2	Cage Clamp	Brass	Ni Plated
3	Terminal	Brass	Tin Plated
4	Screw	Steel	Ni Plated

SPECIFICATIONS

Current Rating: 10 Amp AC300V
 Insulation Resistance: 2000MΩ min
 Wire Strip Length: 4mm~5mm
 Wire Range: 16~26 AWG
 Screw Torque: 1.5 lb-inch
 Withstanding: AC 2000V min
 Operating Temp: -40°C to +105°C



Dimensions			
Poles	A	Poles	A
2	7.00	15	52.50
3	10.50	16	56.00
4	14.00	17	59.50
5	17.50	18	63.00
6	21.00	19	66.50
7	24.50	20	70.00
8	28.00	21	73.50
9	31.50	22	77.00
10	35.00	23	80.50
11	38.50	24	84.00
12	42.00	25	87.50
13	45.50		
14	49.00		

Series	Type	Pitch	Positions	Plating	Color
CMTB	MB332M	XXX	XX	TN	GN
Terminal block	Top screw side entry modular 2 & 3 pos.	350=3.50mm 381=3.81mm	02-25 (3.50mm)	TN=Tin	GN=Green

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/22/06
				Checked	Lizzy	02/22/06
				Drawn	Tina	02/22/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MB332M-350-XX-TN-GN**

Description: Modular Terminal Block, 3.50mm Pitch