
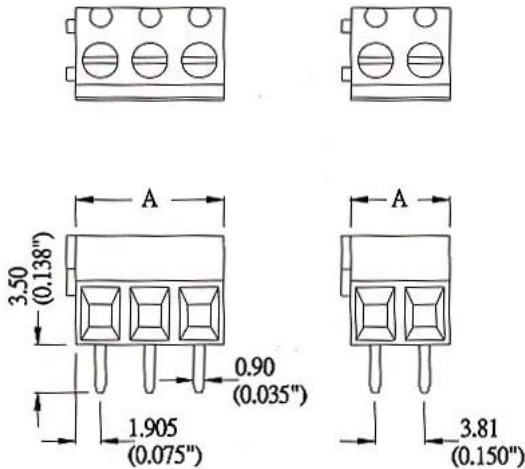



PCB Layout



SPECIFICATIONS

Current Rating: 8Amp AC300V
 Insulation Resistance: 2000MΩ min
 Wire Strip Length: 4mm~5mm
 Wire Range: 16~26 AWG
 Screw Torque: 3.0 lb-inch
 Withstanding: AC 2000V min
 Operating Temp: -40°C to +105°C

Dimensions

Poles	A (3.81)	A (3.50)
2	7.62	7.00
3	11.43	10.50
4	15.24	14.00
5	19.05	17.50
6	22.86	21.00
7	26.67	24.50
8	30.48	28.00
9	34.29	31.50
10	38.10	35.00
11	41.91	38.50
12	45.72	42.00
13	49.53	45.50
14	53.34	49.00
15	57.15	52.50
16	60.96	56.00
17	64.77	59.50
18	68.58	63.00
19	72.39	66.50
20	76.20	70.00
21	80.01	73.50
22	83.82	77.00
23	87.63	80.50
24	91.44	84.00
25	95.25	87.50

RoHS compliant

Item	Name	Material	Finish
1	Insulating Body	Polyamide 66(UL94V-0)	Ni Plated
2	Cage Clamp	Brass	Ni Plated
3	Terminal	Brass	Tin Plated
4	Screw	Steel	Ni Plated

Series	Type	Pitch	Positions	Color
CMTB	MB332M	XXX	XX	XX
Terminal block	Type=MB322M	381=3.81mm 350=3.50mm	2-25	GN=Green

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/22/06
				Checked	Lizzy	02/22/06
				Drawn	Tina	02/22/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MB332M-381-XX-GN**

Description: Modular Terminal Block, 3.81mm Pitch