

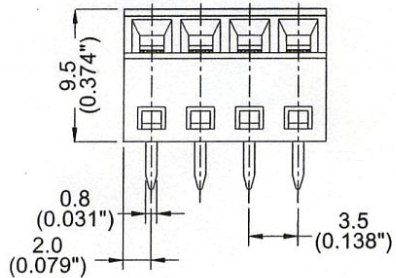


SPECIFICATIONS

Voltage Rating: AC 300V
 Current Rating: 10A
 Wire Size: 28-16 AWG
 Housing Material: Polyamide66 UL94V-0
 Cage Clamp: Brass, Nickel Plated
 Terminal: Brass, Tin Plated
 Screw Size: M2.6, Steel, Zinc Plated
 Operating Temp: -40C to +105C
 Torque: 2.0 lb-inch
 PBC Hole Diameter: $\phi 1.3\text{mm}$

Dimensions	
Poles	A (inch)
2	7.50 (0.295)
3	11.00 (0.433)
4	14.50 (0.571)
5	18.00 (0.709)
6	21.50 (0.846)
7	25.00 (0.984)
8	28.50 (1.122)
9	32.00 (1.260)
10	35.50 (1.398)
11	39.00 (1.535)
12	42.50 (1.673)
13	46.00 (1.811)
14	49.50 (1.949)
15	53.00 (2.087)
16	56.50 (2.224)
17	60.00 (2.362)
18	63.50 (2.500)
19	67.00 (2.638)
20	70.50 (2.776)
21	74.00 (2.913)
22	77.50 (3.051)
23	81.00 (3.189)
24	84.50 (3.327)



PCB Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/23/10
				Checked	Lizzy	02/23/10
				Drawn	Tina	02/23/10
				0.0 \pm 0.35	0.00 \pm 0.20	Angles \pm 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MB552-350-XX-GN**

Description: Terminal Block