
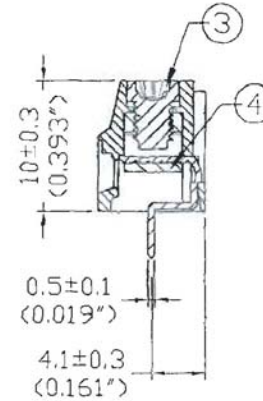
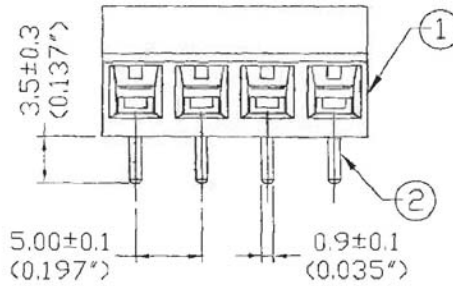
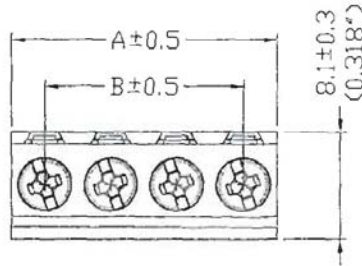


PCB Layout

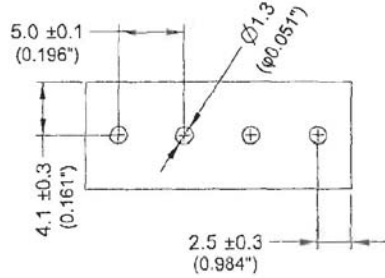

SPECIFICATIONS

Current Rating: 16Amp AC300V
 Insulation Resistance: 2000MΩ min. DC500V
 Wire Strip Length: 4mm ~ 5mm
 Wire Range: 14~26 AWG
 Screw Torque: 4.5 lb-inch
 Withstanding: AC 2000V min
 Operating Temp: -40°C to +105°C

Dimensions		
Poles	A	B
2	10.00	5.00
3	15.00	10.00
4	20.00	15.00
5	25.00	20.00
6	30.00	30.00
7	35.00	30.00
8	40.00	35.00
9	45.00	40.00
10	50.00	45.00
11	55.00	50.00
12	60.00	55.00
13	65.00	60.00
14	70.00	65.00
15	75.00	70.00
16	80.00	75.00

RoHS compliant

Item	Name	Material	Finish
1	Insulating Body	Polyamide 66 (UL94V-0)	Green
2	Terminal	Brass	Tin Plated
3	Screw	Steel	Zinc +Cr +3
4	Cage Clamp	Brass	Nickel Plated

Series	Type	Pitch	Positions	Color
CMTB	MB612	XXX	XX	GN
Terminal Blocks	Side Entry	500=5.00mm 508=5.08mm	02-16	GN=Green

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/29/06
				Checked	Lizzy	06/29/06
				Drawn	Tina	06/29/06

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'
 UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MB612-XXX-XX-GN**

Description: Terminal Block, Side Entry