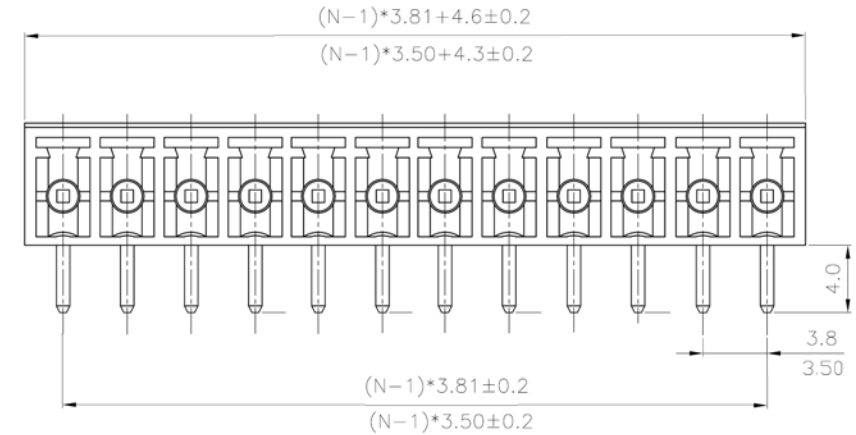





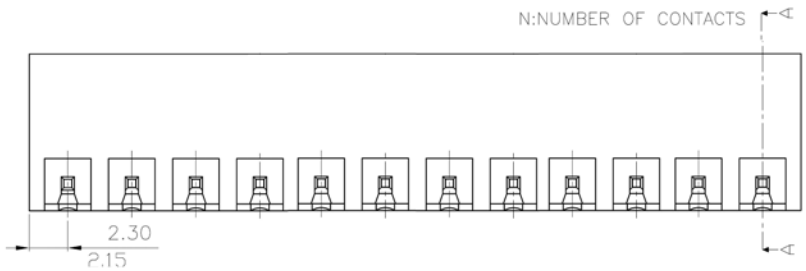





SPECIFICATIONS

| | |
|---|---|
| Voltage Rating: | 300V |
| Current Rating: | 8A |
| Contact Resistance: | 20mΩ |
| Insulation Resistance: | 5000MΩ/1000V |
| Withstanding: | AC2000V/1min |
| Pin Header: | Brass, Tin Plated |
| Housing: | PA66, UL94V-0 |
| Temperature Range: | -40°C ~ +130°C |
| Max Soldering: | +250°C for 5 Sec. |

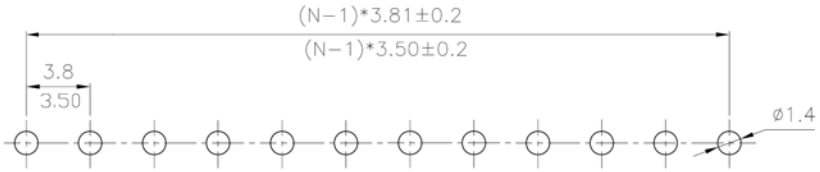


| Series | Style | Pitch | Positions | Color |
|---|---|---|---|---|
| CMTB | ME030 | XXX | XX | GY |
| Terminal block | Right Angle closed end plug-able | 381=3.81mm<br>350=3.50mm | 02-22 | GN=Green<br>BK=Black<br>GY=Grey |

RoHS compliant

| Rev. | Description | Date | Approved |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| Drawing | Name | Date |
|---|---|---|
| Approved | Howard | 01/07/03 |
| Checked | Lizzy | 01/07/03 |
| Drawn | Tina | 01/07/03 |

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'

UNIT: mm

**Central Components Manufacturing**
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: CMTB-ME030-350-12-GY

Description: Right Angle closed end plug-able terminal block