
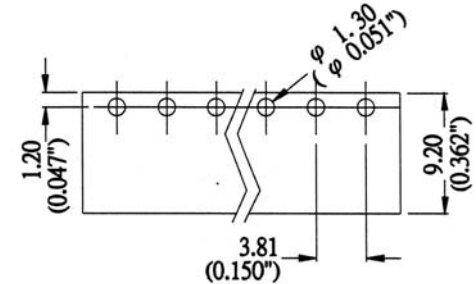
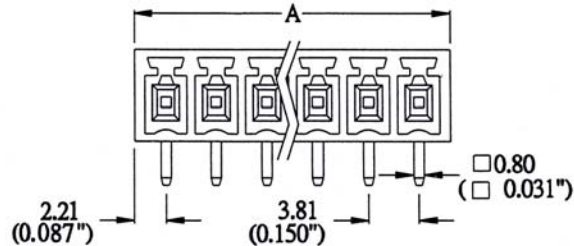


Dimensions					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	8.23	0.324	15	57.76	2.274
3	12.04	0.474	16	61.57	2.424
4	15.85	0.624	17	65.38	2.571
5	19.66	0.774	18	69.19	2.724
6	23.47	0.924	19	73.00	2.874
7	27.28	1.074	20	76.81	3.024
8	31.09	1.224	21	80.62	3.174
9	34.90	1.374	22	84.43	3.324
10	38.71	1.524			
11	42.52	1.674			
12	46.33	1.824			
13	50.14	1.974			
14	53.95	2.124			

**SPECIFICATIONS**

Current Rating: 12 Amp AC300V  
 Contact Material: Brass, Tin Plated  
 Insulation Material: Polyamide 66 UL94V-0, Green  
 Insulation Resistance: 2000MΩ min. DC500V  
 Withstanding: AC2000V min  
 Operating Temp: -40°C to +105°C



Also available in Vertical  
& Open end

RoHS compliant

Series	Style	Pitch	Positions	Color
CMTB	ME030	XXX	XX	GN
Terminal block	Right Angle closed end plug-able	381=3.81mm 350=3.50mm 500=5.00mm 508=5.08mm	02-22	GN=Green

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/07/03
				Checked	Lizzy	01/07/03
				Drawn	Tina	01/07/03
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-ME030-381-XX-GN**

Description: Right Angle closed end plug-able terminal block