


SPECIFICATIONS

Voltage Rating: 300 V
 Current Rating: 20 A
 Contact Resist: 20 mil Ohm
 Insulation Resist: 5000 Meg ohms at 1000V
 Withstanding : 1500 VAC for 1 min.
 Housing Material: PA66 UL94V-0
 Contacts: Brass tin plated
 Screws: M3 steel zinc plated
 Operating temp: -40°C to +105°C
 Processing temp: 250°C for 5 sec max.
 Wire range: 12-24 AWG

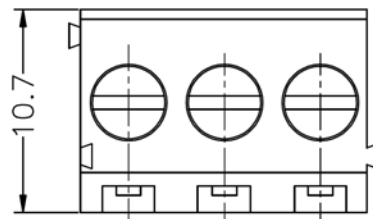

Series	Type	Pitch	Positions	Color
CMTB	MF129	XXX	XX	XX
Terminal block	Modular terminal block, top screw side entry. Also see MF129R for right angle mount	500=5.00mm 508=5.08mm (.200")	02-24	GN=Green BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/16/07
				Checked	Lizzy	02/16/07
				Drawn	Tina	02/16/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MF129-508-XX-GN**

Description: Modular terminal block, top screw side entry.