
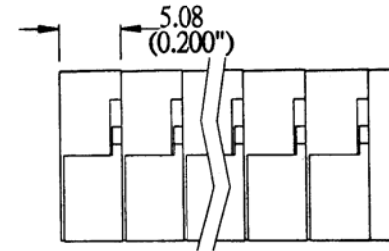




PCB Layout

SPECIFICATIONS

Voltage rating:	300VAC
Current rating:	10 amps
Terminal material:	Brass
Spring material:	Stainless steel
Body material:	Polyamide 66, UL94V-0
Insulation resistance:	5,000 megohms min.
Lever material:	Polyamide 66, UL94V-0
Withstanding:	2,000 VAC/min
Operating temperature:	-55C to +105C
Wire range:	14-24 AWG

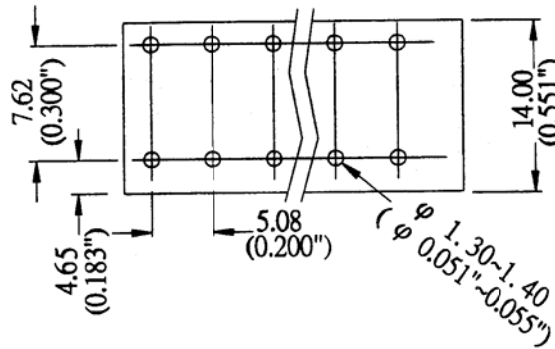

Dimensions	
Item	A
2	12.70
3	17.78
4	22.86
5	27.94
6	33.02
7	38.10
8	43.18
9	48.26
10	53.34
11	58.42
12	63.50
16	83.82

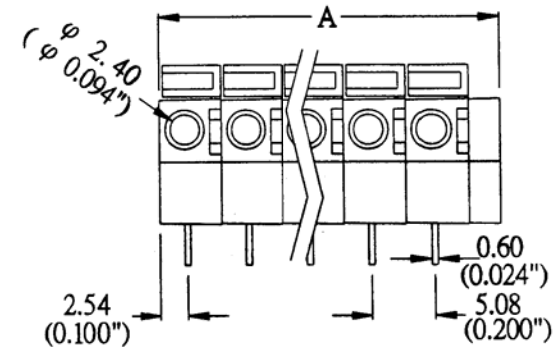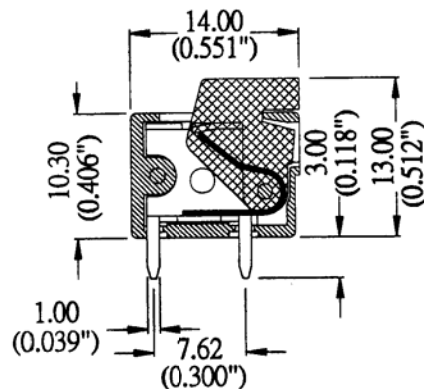

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-MX222-508-XX-GN**

Description: Terminal block, screw-less, 5.08mm pitch