


SPECIFICATIONS

Voltage Rating: 300V
 Current Rating: 20A
 Contact Pin: Brass, Tin Plated
 Insulator: Thermoplastic UL94V-0
 Flange Nut: Brass, M2.5
 Withstanding: 1.6KV
 Operating Temp: -40°C to +115°C
 Soldering Temp: 250°C

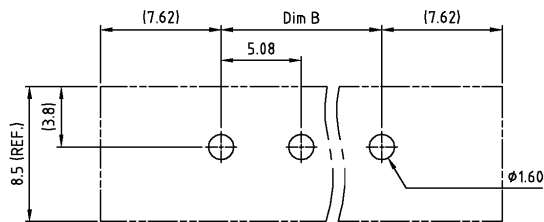

RECOMMENDED PCB LAYOUT

Series	Type	Pitch		Poles	Color
CMTB	OQF	XXX		XX	XX
Terminal Block	180° With Flange	350=3.5mm	700=7mm	02-24	GN=Green BK=Black BL=Blue GY=Gray
		381=3.81mm	762=7.62mm		
		500=5.00mm	1000=10.00mm		
		508=5.08mm	1016=10.16mm		
		508S=5.08mm	1016S=10.16mm		
		Short Body	Short Body		

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/24/09
				Checked	Lizzy	03/24/09
				Drawn	Tina	03/24/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-OQF-XXX-XX-XX**

Description: Terminal Block 180° With Flange