
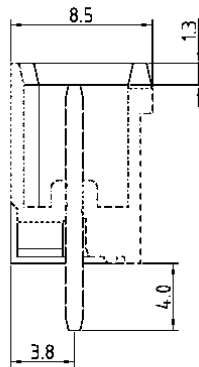


N=Number of contacts

P.C.B. LAYOUT

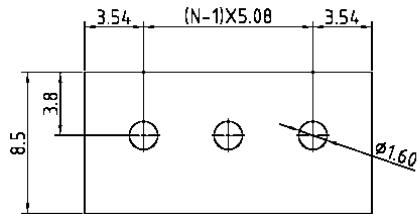

**SPECIFICATIONS**

Voltage rating: 250 VAC  
 Current rating: 15 amps  
 Pin material: Brass  
 Pin plating: Tin  
 Insulator material: Nylon 66  
 Insulation resistance: 500 megohms at 500VDC  
 Withstanding: 1,500 VAC/1 min.  
 Operating temperature: -40°C to +105°C  
 Processing temperature: 250°C/5 sec.

RoHS compliant

Series	Style	Pitch	Positions	Color
CMTB	OQXX	XXX	XX	XX
Terminal block	V=Vertical, open R=Rt. angle, open VC=Vertical closed RC=Rt. angle, closed	508=5.08mm 1016=10.16mm 500=5mm 1000=10mm	02-24	GN=Green BK=Black BL=Blue GY=Gray

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	2/25/09	Greg	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-OQVC-508-XX-GN**

Description: Terminal block, plug-able, PCB mount, vertical closed end