


SPECIFICATIONS

Voltage Rating: 450V (600 UL)
 Current Rating: 17.5 amps (20-30 UL)
 Housing Material: Nylon 66, UL94V-2
 Screw Material: M2.6x5
 Wire: 22-12 AWG Str.
 22-10 AWG Sol.
 Operating Temp: Up to 110°C

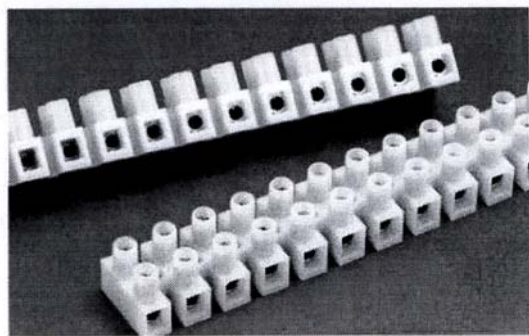

Dimensions								
Pitch	A	B	C	D	E	F	Screw	Wire
8.20	96.20	17.0	14.5	8.2	2.9	2.8	M2.6x5	22-12
10.0	117.2	20.2	16.8	10.0	3.6	3.4	M3.0x6	22-10
12.0	140.7	23.8	19.0	12.0	3.9	4.2	M3.5x7	22-10
13.50	158.0	25.6	25.0	13.5	4.4	5.0	M4.0x9	20-8
14.50	170.0	28.1	23.0	14.5	4.2	6.0	M4.0x9	14-6
16.50	194.4	37.0	28.7	16.5	4.2	7.0	M5.0x11	12-4

Series	Type	Pitch	Position	Color
CMTB	PAHDS	XXXX	XX	WT
Terminal	Side Entry Top Screw	820=8.20mm 1000=10.00mm 1200=12.00mm 1350=13.50mm 1450=14.50mm 1650=16.50mm	02-12	WT=White

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/05/06
				Checked	Lizzy	05/05/06
				Drawn	Tina	05/05/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-PAHDS-XXXX-XX-WT**

Description: Terminal Block, Side Entry Top Screw