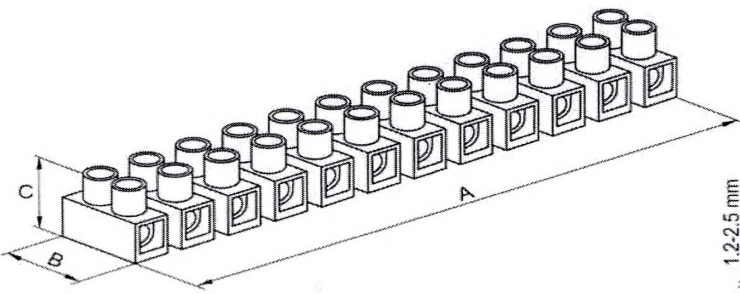
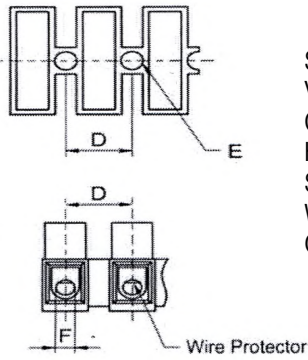



	1	2	3	4	5	6	7	8	9
A								<p>SPECIFICATIONS</p> <p>Voltage Rating: 450-500V (600 UL) Current Rating: 17.5-76 amps (20-30 UL) Housing Material: Nylon 66, UL94V-2 Screws: See Chart Wire: See Chart Operating Temp: Up to 110°C</p>	
B									
C									
D									
E									
F									
G									


Diminsions								Wire Size	Ratings	Certifications
Pitch	A	B	C	D	E	F	Screw	AWG		
PA8H	96.20	17.0	14.5	8.2	2.9	2.8	M2.6x5	22-12	450V, 17.5A	
PA10H	117.2	20.2	16.8	10.0	3.6	3.4	M3.0x6	22-10	450V, 24A	
PA12H	140.7	23.8	19.0	12.0	3.9	4.2	M3.5x7	22-10	500V, 41A	
PA14H	158.0	25.6	25.0	13.5	4.4	5.0	M4.0x9	20-8	500V, 57A	
PA16H	170.0	28.1	23.0	14.5	4.2	6.0	M4.0x9	14-6	500V, 76A	
PA18H	194.4	37.0	28.7	16.5	4.2	7.0	M5.0x11	12-4		

Series	Pitch (XX)	Position	Color
CMTB	PAXXH	12	XX
Terminal Block	8=8.20mm 10=10.00mm 12=12.00mm 14=13.50mm 16=14.50mm 18=16.50mm	12 Positions	Blank=Natural

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/05/06
				Checked	Lizzy	05/05/06
				Drawn	Tina	05/05/06

		
UNIT: mm		

						 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919			
						Part No.: CMTB-PAXXH-XX-XX			
						Description: Terminal Block, Side Entry Top Screw			