
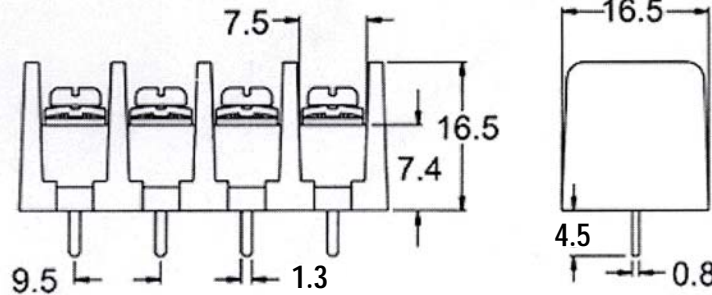


**SPECIFICATIONS**

Current Rating: 20Amp AC300V  
 Wire Range: 14~22 AWG  
 Screw Torque: 12 lb-inch  
 Insulation Resistance: >2000MΩ DC500V  
 Withstanding: AC2000V min  
 Operating Temp: -40°C to +120°C

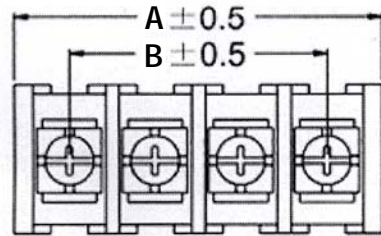

Pitch: 9.50mm (0.374inch)					
Poles	A(mm)	B(mm)	Poles	A(mm)	B(mm)
2	21.50	9.50	14	135.50	123.50
3	31.00	19.00	15	145.00	133.00
4	40.50	28.50	16	154.50	142.50
5	50.00	38.00	17	164.00	152.00
6	59.50	47.50	18	173.50	161.50
7	69.00	57.00	19	183.00	171.00
8	78.50	66.50	20	192.50	180.50
9	88.00	76.00	21	202.00	190.00
10	97.50	85.50	22	211.50	199.50
11	107.00	95.00	23	221.00	209.00
12	116.50	104.50	24	230.50	218.50
13	126.00	114.00	25	240.00	228.00

RoHS compliant

Item	Name	Material	Finish
1	Insulating Body	PBT(UL94V-0)	Black
2	Terminal	Brass	Tin Plated
3	Screw	Steel	Nickel Plated

Series	Type	Pitch	Position	Color
CMTB	T34BM11	950	XX	BK
Terminal Block	Type: T34 Terminal: BM11	950=9.5mm	02-30	BK=Black

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-T34BM11-950-XX-BK**

Description: Barrier Type Terminal Block T34 Series