



**SPECIFICATIONS**

Current rating: 20 amps  
 Voltage rating: 300VAC  
 Insulation resistance: 2,000 megohms min. @ 500VDC  
 Withstanding: 200VAC min.  
 Wire range: 14-22AWG  
 Screw torque: 12 lb-in

Dimensions (Pitch: 9.50mm [0.374"])					
Poles	L (mm)	S (mm)	Poles	L (mm)	S (mm)
02	36.2	28.7	15	159.7	152.2
03	45.7	28.2	16	169.2	161.7
04	55.2	47.7	17	178.7	171.2
05	64.7	57.2	18	188.2	180.7
06	74.2	66.7	19	197.7	190.2
07	83.7	76.2	20	207.2	199.7
08	93.2	85.7	21	216.7	209.2
09	102.7	95.2	22	226.2	218.7
10	112.2	104.7	23	235.7	228.2
11	121.7	114.2	24	245.2	237.7
12	131.2	123.7	25	254.7	247.2
13	140.7	133.2	26	264.2	256.7
14	150.2	142.7	27	273.7	266.2

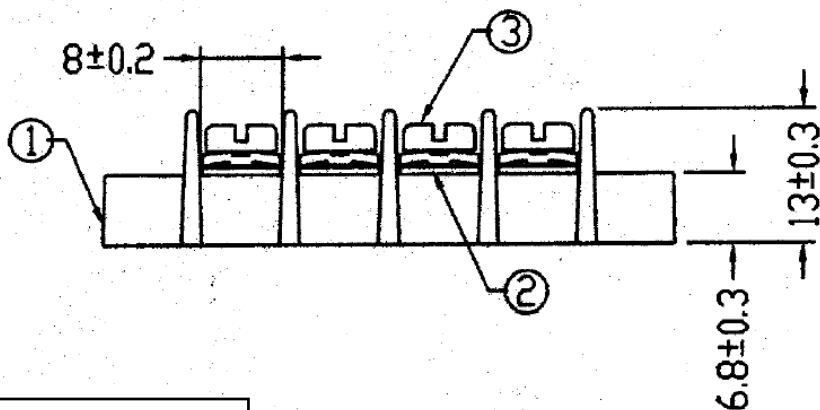

Item	Name	Material	Finish
1	Insulating body	PC	Black
2	Terminal	Brass	Tin
3	Screw	Steel	Nickel

RoHS compliant

Series	Type	Pitch	Poles	Color
CMTB	T64WCF	950	XX	BK
Terminal block	Barrier strip with flange	950=9.5mm pitch	02-27	BK=Black

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/12/02
				Checked	Lizzy	08/12/02
				Drawn	Tina	08/12/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-T64WCF-950-XX-BK**

Description: Barrier strip, dual screws, mounting flange