


SPECIFICATIONS

- Current Rating: 15A/17A/15A
- Voltage Rating: 300VAC
- Terminal Body: Brass
- Terminal Screw: Steel Zinc Plating
- Wire Guard: PhBz Tin plated
- Insulator: Thermoplastic UL94V-0
- Wire Range: 2.5mm²/0.34-2.5mm²
- Solid Wire: 12-24
- Stranded Wire: 12-24
- Torque: 3.5LB-In./0.5Nm/0.56Nm
- Screw: M3
- Wire Strip Length: 6-7mm
- Withstanding: 1.6KV/2.5KV/2.5KV
- Operating Temp: -30°C to +105°C

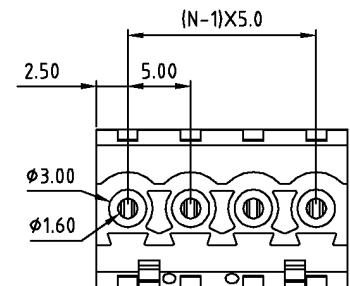

N = Number of contacts

Series	Type	Pitch		Poles	Color
CMTB	TSB	500		XX	XX
Terminal Block	TSA=Plug, Front Latch	350=3.5mm	700=7mm	02-24	BK=Black GN=Green BL=Blue GY=Gray
	TSB=Plug, Rear Latch	381=3.81mm	762=7.62mm		
		500=5mm	1000=10mm		

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/07/06
				Checked	Lizzy	08/07/06
				Drawn	Tina	08/07/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-TSB-500-XX-XX**

Description: Terminal Block, 5.00mm pitch TSA/TSB Series

