



P.C.B, LAYOUT

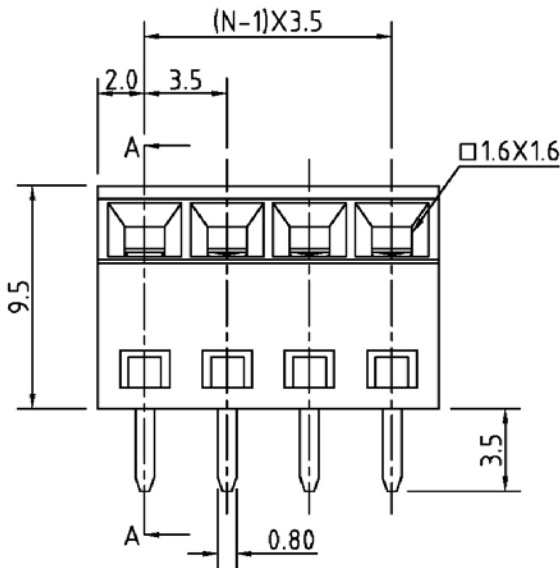

N=Number of contacts

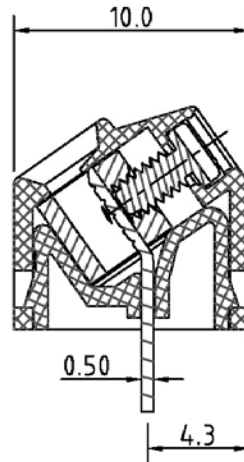

SECTION A-A

SPECIFICATIONS

Current Rating:	10A
Voltage Rating:	300V AC
Contact Material:	Brass
Solder Tail Material:	Tin plated
Metal Housing:	Brass
Insulator Material:	Thermoplastic UL94V-0
Screw Material:	Steel Zinc plating
Withstanding:	1.6KV
Wire Strip Length:	6-7mm
Screw:	M2
Torque:	1.7 Lb-In
Solid Wire Range:	16-28 AWG
Stranded Wire Range:	16-28 AWG
Soldering Temp.:	245°C ± 10°C / 5 sec.
Operating Temp.:	-30°C to +105°C

Series	Type	Pitch	Positions	Color
CMTB	TV	X	XX	XX
Terminal Block	45° entry	350=3.5mm 381=3.81mm	02-24	GN=Green BK=Black BL=Blue GY=Gray

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/26/07
				Checked	Lizzy	04/26/07
				Drawn	Tina	04/26/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-TV-350-XX-XX**

Description: Terminal Block 45° Entry, 3.5mm Pitch