
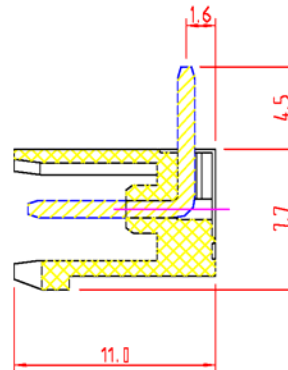
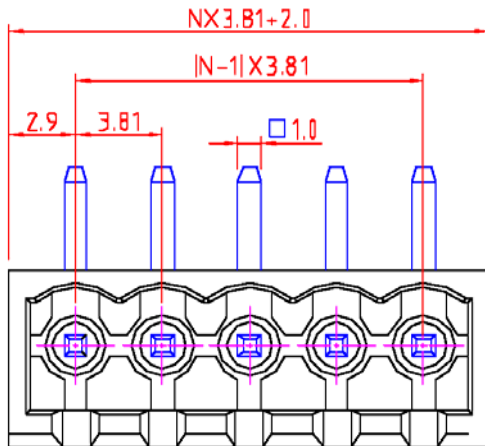


N=Number of contacts.

PCB. LAYOUT

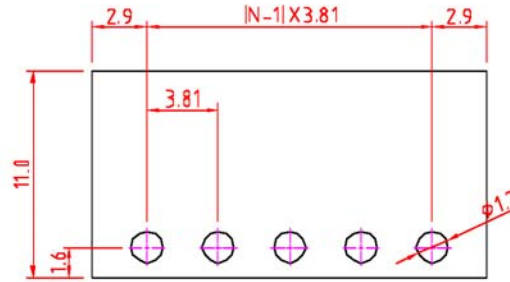

SPECIFICATIONS

Current Rating: 8A
 Voltage Rating: 300V AC
 Solder Pin: Brass, Tin Plating
 Insulator Material: Polyamide, UL94V-0
 Insulation Resistance: 500M Ω at DC 500V
 Withstanding: AC 1500V
 Temperature Range: -30°C to +105°C
 Soldering Temp: +245, 5 Seconds Max

Series	Style	Pitch	Positions	Color
CMTB	VE-381	XXX	XX	GN
Terminal block	90° closed end plug-able	381=3.81mm	02-24	GN=Green BK=Black BL=Blue GY=Grey

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/07/03
				Checked	Lizzy	01/07/03
				Drawn	Tina	01/07/03
				0.0 \pm 0.35	0.00 \pm 0.20	Angles \pm 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-VE-381-XX-XX**

Description: 90° closed end plug-able terminal block