


SPECIFICATIONS

Voltage Rating: 300V
 Current Rating: 15A
 Molded Parts: Thermoplastic, UL94V-0, Black
 Insulation Resistance: 1000 MΩ min
 Terminal Material: Brass, 0.8t, Tin Plated
 Terminal Screws: Steel, Ni Plated, M3
 Wire Range: 14~22 AWG
 Screw Torque: 6.0Kgf cm
 Withstanding: AC 2000 V/min
 Operating Temp: -40°C ~ +115°C

Dimensions					
Poles	A	B	Poles	A	B
2	17.16	7.62	11	85.74	76.20
3	24.76	15.24	12	93.36	83.82
4	32.40	22.86	13	100.98	91.44
5	40.02	30.48	14	108.60	99.06
6	47.64	38.10	15	116.22	106.68
7	55.26	45.72	16	123.84	114.30
8	62.88	53.34	17	131.46	121.92
9	70.50	60.96	18	139.08	129.54
10	78.12	68.58	19	146.70	137.16
			20	154.32	144.78

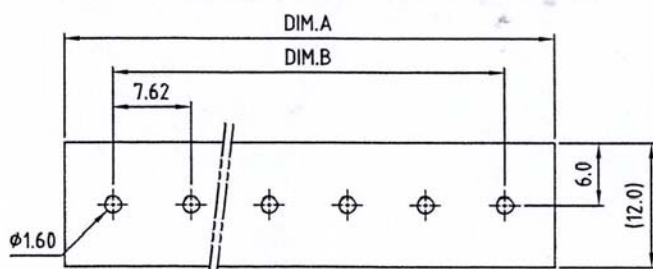

P.C.B LAYOUT

Series	Type	Pitch	Poles	Color
CMTB	YK303X	762	XX	BK
Terminal Block	X: [blank]=No Options F=Flange C=Cover FC=Flange & Cover	762=7.62mm Pitch	02-20 poles	BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/17/08
				Checked	Lizzy	07/17/08
				Drawn	Tina	07/17/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-YK303X-762-XX-BK**

Description: Terminal Block W/o Flange & W/o Cover