


T:1.6 Dimensions of PC board holes
Tolerance :±0.05(Printed-top view)

Item	Name	Material	Finish
1	Flat Piece	C2680 t=0.30	Ag Plated
2	Spring Piece	C5191 t=0.30	Ag Plated
3	Spring Piece	C5191 t=0.30	Ag Plated
4	Terminal	C2680 t=0.30	Ag Plated
5	Bushing	H59 (copper alloy)	Ni Plated
6	Cover	PBT 4815	UL94V-0 Black
7	Housing	PBT 4815	UL94V-0 Black
8	Spring	SWC Wire	
9	Spring	SWC Wire	
10	Nut	C2680	Ni Plated

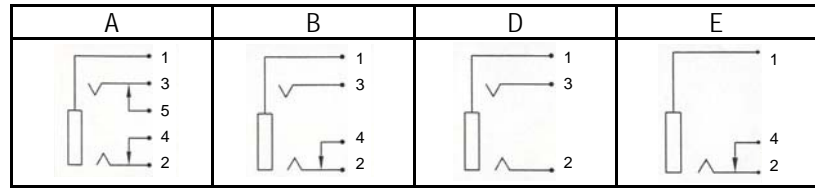

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

Series	Style	Bushing	Schematic	Bushing Plating	Terminal Plating	Housing Color	Options
CPJ	03505	XX	X	X	X	XX	XX
Phone Jack	3.5mm side entry through hole	M=Metal MT6=Metal w/ m6 Thread PR=Plastic w/Metal Ring	See diagram	N=Nickel (std)	S=Silver (std) T=Tin G=Gold	BK=Black (std)	R=Round Nut H=Hex Nut

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/06/11
				Checked	Lizzy	12/06/11
				Drawn	Tina	12/06/11
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: in		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-03505-XX-X-N-X-BK-R**

Description: 3.5 Phone Jack