


RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

SPECIFICATIONS

- Current rating: 0.3 A
- Contact resist.: 50 milliohms max.
- Terminals: Copper alloy, selective gold plated
- Housing: Thermoplastic UL 94V-0
- Insulation resist.: 100 megohms min.
- Shield: Brass
- Withstanding: 500 VAC/1-min.
- Durability: 5000 cycles min.
- Operating temp.: -25°C to +85°C
- Processing temp.: 230°C for 30-60 sec.

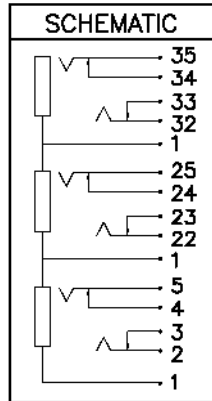

RoHS compliant

Series	Type	Color (A,B,C)		Front shield finish	Rear shield finish
CPJ	34470	XXXXXXXX		X	X
Phone jack	3 pos. stacked	AQ=Aqua BL=Blue OR=Orange	GR=Green GY=Gray PK=Pink	T=Tin (Std) G=Gold	N=Nickel (Std) G=Gold

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	8/10/99
				Checked	Lizzy	8/10/99
				Drawn	Tina	8/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-34470-XXXXXX-X-X**

Description: 3 position stacked 3.5mm phone jack, vertical PCB mount