

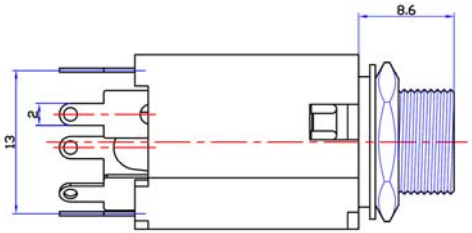



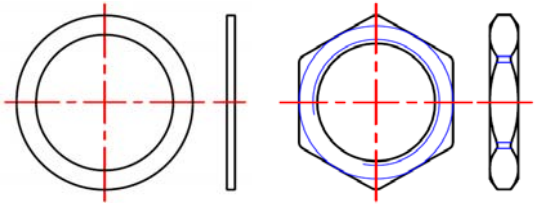

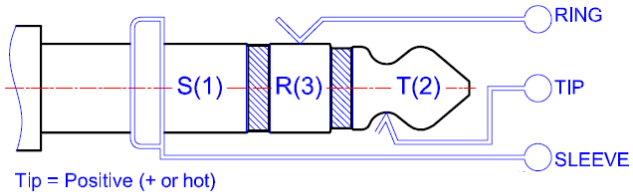

Tip = Positive (+ or hot)
Ring = Negative (- or cold)
Sleeve = Shield or ground

View A Detail

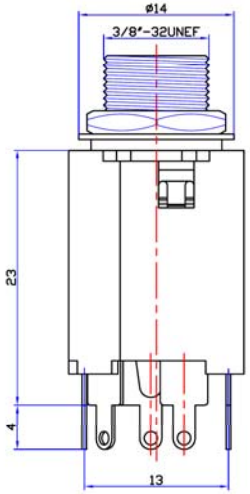

P.C.B. Layout(Bottom View)





Item	Name	Material	Plating
1	Contact Spring	QSn6.5-0.1 T t=0.35	D, Ag
2	Contact Spring	!Sn6.5-0.1 T t=0.4	D, Ag
3	Contact Spring	QSn6.5-0.1T t=0.4	D, Ag
4	Contact Tip	H62 Y t=0.4	D, Ag
5	Contact Tip	H62 Y t=0.4	D, Ag
6	Housing	PBT, Blue	Blue
7	Outer Conductor	H59	D, Ag
8	Screw Cap		
9	Gasket		

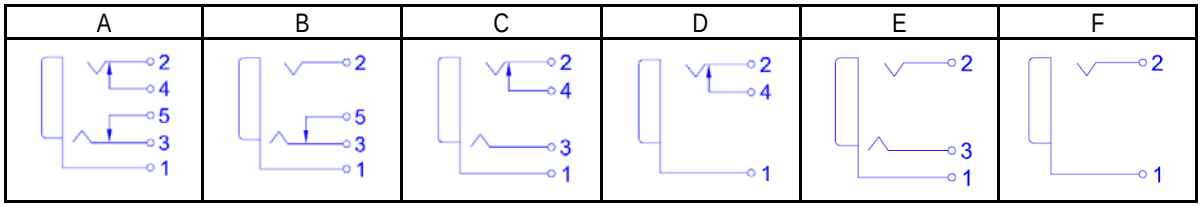

RoHS compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	10/19/10
Checked	Lizzy	10/19/10
Drawn	Tina	10/19/10

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'

UNIT: mm

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: CPJ-GZ-6212A-XX

Description: Phone Jack Type GZ-6212A