


SPECIFICATIONS

Housing:	Thermoplastic
Terminal:	Brass / Phosphor bronze
Withstanding:	AC 500V, 60Hz for 1 min
Insulation Resistance:	30mΩ (min.) at 500V DC
Contact Resistance:	30mΩ max
Insertion & Extraction Force:	0.3 to 2.0kgs
Durability:	5,000 cycles unloading (20-30 cycles per min)

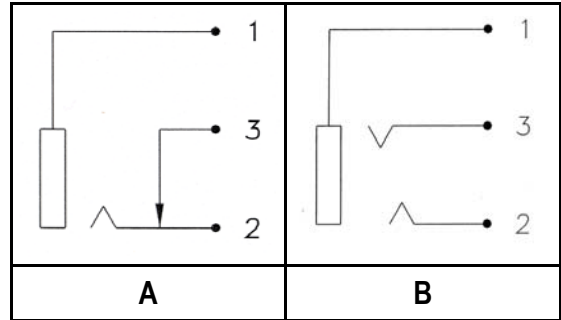

Series	Style	Bushing	Bushing Plating	Terminal Plating	Schematic	Hardware
CPJ	J210	MT	X	X	X	X
Phone Jack	2.5mm Panel Mount	Metal Threaded	N = Nickel (std) G = Gold	S = Silver (std) G = Gold T = Tin	A,B See chart	Blank = none HDR = round nut HDH = hex nut

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/31/08
				Checked	Lizzy	01/31/08
				Drawn	Tina	01/31/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J210-MT-X-X-X-X**

Description: 2.5mm panel mount phone jack