

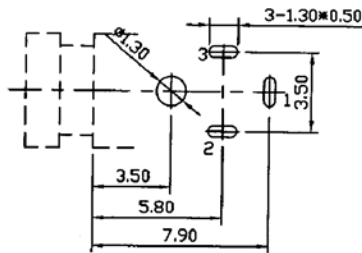
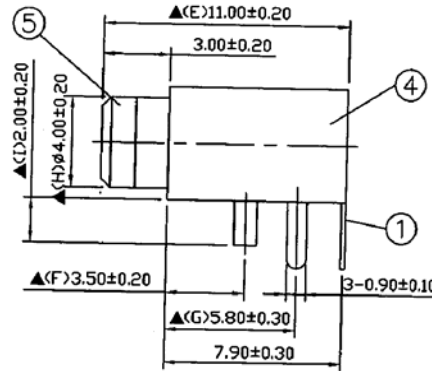


SPECIFICATIONS:
 Contact resistance: 30 milliohms max.
 Insulation resistance: 100 megohms min. at 500VDC
 Withstanding: 500VAC for 1 min.

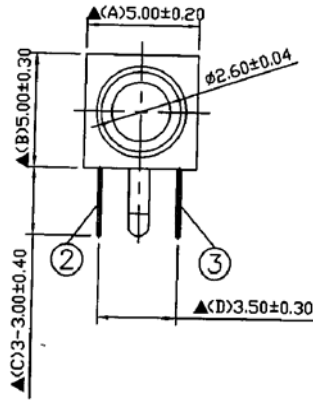

Item	Name	Material	Finish
1	Ground terminal	Phosphor bronze	Silver
2	Tip spring	Phosphor bronze	Silver
3	Tip spring	Phosphor bronze	Silver
4	Housing	POM	Black
5	Bushing	Brass	Nickel

Series	Style	Plating	
CPJ	J224R2	XX	
Phone jack	2.5mm right angle through-hole	Bushing N=Nickel (standard) G=Gold 0=None	Terminal S=Silver (standard) T=Tin G=Gold

RoHS compliant

Pin Hole Layout
(Jack Bottom View)

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J224R2-XX**

Description: Phone jack, 2.5mm right angle, through-hole