


Pin Hole Layout
(Jack Bottom View)



RoHS compliant

Item	Name	Material	Finish
1	Ground terminal	0.5T steel	Tin
2	Ring spring	0.3T phosphor copper	Silver
3	Break terminal	0.4T brass	Silver
4	Break terminal	0.4T bronze	Silver
5	Tip spring	0.3T TiCuR1-M-EH	Silver
6	Sleeve (barrel)	Brass	Nickel
7	Housing	PBT	Black
8	Cover	PBT	Black

SPECIFICATIONS

Contact resistance:


30 milliohms max.

Insulation resistance:

100 megohms min. at 500VDC

Withstanding:

500VAC/1-min.

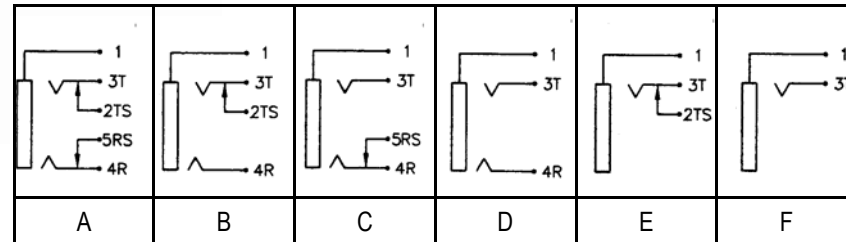

Series	Style	Bushing		Schematic	Plating (Bushing/Terminal)		Color		Options
CPJ	J356	X		X	XX		XX		X
Phone jack	Ø3.5mm right angle PCB mount	M=Metal T=Metal threaded MP=Metal w/ plastic cover	MPB=Metal w/ plastic cover, metal base plate	A-F (See table)	Bushing N=Nickel (std) G=Gold	Terminal S=Silver (std) T=Tin G=Gold	BK=Black (std) BL=Blue RD=Red	BG=Beige GN=Green GY=Gray	Blank=None H=Hex nut R=Round nut

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J356-X-X-XX-XX-X**

Description: Phone jack, Ø3.5mm, right angle PCB mount