


**SPECIFICATIONS**  
 Contact Resistance: 30mΩ max.  
 Insulation Resistance: 100MΩ min. at DC 500V  
 Withstanding: AC 500V

Item	Name	Material	Finish
1	Housing	PBT	Black Color
2	Cover	PBT	Black Color
3	Earth Terminal	0.3T Brass	Silver Plated
4	Shunt Terminal	0.3T Brass	Silver Plated
5	Tip Spring	0.25T Brass	Silver Plated
6	Spring L	SUS-304	
7	Barrel	Brass	Nickel Plated
8	Nut	1.5T Brass	Nickel Plated

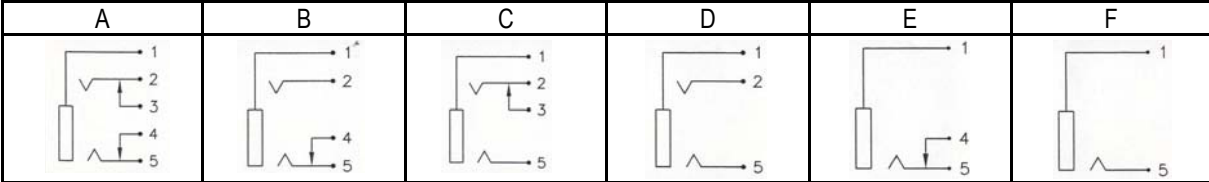

Series	Style	Bushing	Schematic	Bushing Plating	Terminal Plating	Housing Color	Options
CPJ	J368	XX	X	X	X	XX	XX
Phone Jack	3.5mm Side Entry	M=Metal MT=Metal w/ m6 Thread P=Plastic PR=Plastic w/ Metal Ring RP=Plastic w/ Metal Ring & Cap PTR=Plastic w/ m6 Thread & Metal Ring	A-F	N=Nickel (std) G=Gold E=None	S=Silver (std) T=Tin G=Gold	BK=Black BG=Beige BL=Blue GN=Green RD=Red GY=Grey	R=Round Nut H=Hex Nut

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/06/11
				Checked	Lizzy	12/06/11
				Drawn	Tina	12/06/11
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: in		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J368-XX-X-X-X-XX-XX**

Description: 3.5 Phone Jack