



SPECIFICATIONS
 Contact resistance:
 Insulation resistance:
 Withstanding:

30 milliohms max.
 100 megohms min./500VDC
 500VAC/1-min.



Item	Name	Material	Finish
1	Ground terminal	0.4T brass	Silver
2	Tip spring	0.4T phosphor bronze	Silver
3	Ring spring	0.4T phosphor bronze	Silver
4	Ring shunt	0.4T brass	Silver
5	Barrel	Brass	Nickel
6	Housing	PBT	Black
7	Nut	2.2T brass	Nickel
8	Washer	0.4T brass	Nickel

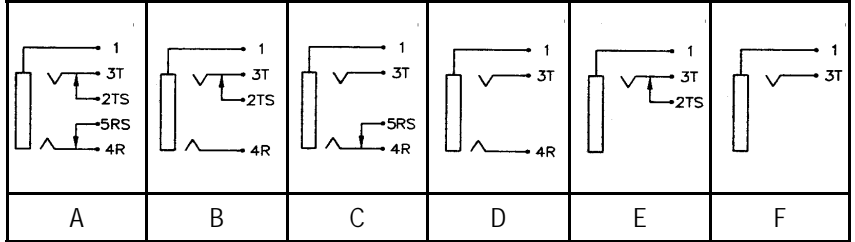

Series	Style	Bushing	Schematic	Bushing plating	Terminal plating	Options
CPJ	J649	X	X	X	X	XX
Phone jack	ø6.3mm straight PCB mount	M=Metal bushing P=Plastic bushing R=Metal ring	See table	N=Nickel (std) G=Gold E=None	S=Silver (std) T=Tin G=Gold	[blank]=None HW=With nut and washer

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J649-M-X-X-X-XX**

Description: Phone jack, ø6.3mm, straight PCB mount