


**SPECIFICATIONS**

Contact material:	Phosphor bronze
Contact resistance:	30 milliohms max.
Terminal material:	Brass
Housing material:	Thermoplastic
Insulation resistance:	100 megohms min. at 500VDC
Withstanding:	500VAC for 1 min.
Durability:	5,000 cycles min.

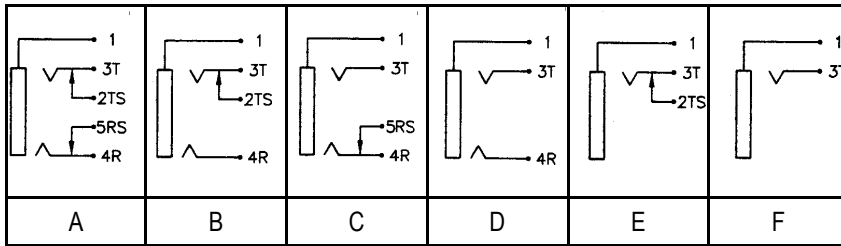

Series	Style	Bushing	Schematic	Terminal plating	Options
CPJ	SCJ650	X	X	X	XX
Phone jack	ø6.3mm straight PCB mount	M=Metal P=Plastic	See table	SI=Silver (std) TN=Tin GD=Gold	Blank=None HW=With nut & washer

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	P/N	10/05/07	Tom	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPJ-J650-X-X-XX-XX**

Description: Phone jack, ø6.3mm, straight PCB mount