
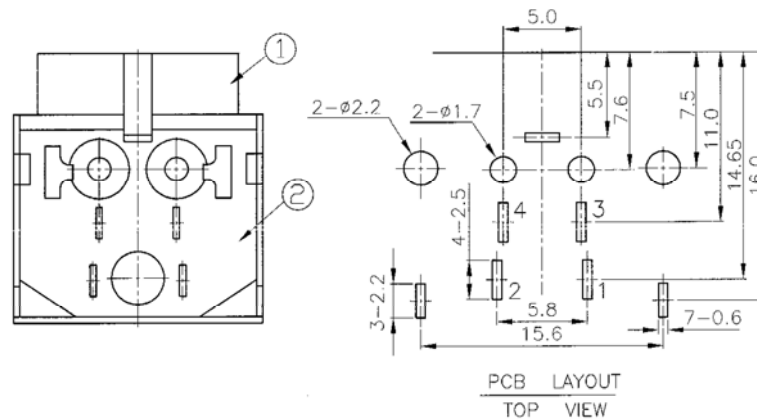


**SPECIFICATIONS**

Current Rating: 20VDC 7.5A Max  
 Withstanding: 250V RMS / minute  
 Insulation Resistance: 50M Ohm Min @ 250VDC (before testing)  
 5MOhm Max @20mA, 1KHZ (after testing)  
 Contact Resistance: 30m Ohm Max @ 20mA, 1KHZ (before testing)  
 60m Ohm Max @20mA, 1KHZ (after testing)  
 Insertion Force: 6.0KG Max  
 Withdrawal Force: 0.5-6.0KG



Item	Name	Material	Finish
1	Body	PBT	UL94V-0
2	Cover	PBT	UL94V-0
3	Earth Terminal	BSR-H 0.4t	Tin
4	Contact Terminal	BSR-H 0.3t	Tin
5	Shield	SPCC-0.4t	Tin

Series	Type	Contacts	Shield
CPMDJ	003	XX	X
Mini Din Power Jack	Type 003	4 Power 0 Data	Blank=None B=4 Sides


**RoHS compliant**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	10/27/00
				Checked	Lizzy	10/27/00
				Drawn	Tina	10/27/00
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPMDJ-003-40-B**

Description: Mini DIN Power Jack



UNIT: mm