




Recommended Panel Cut-out

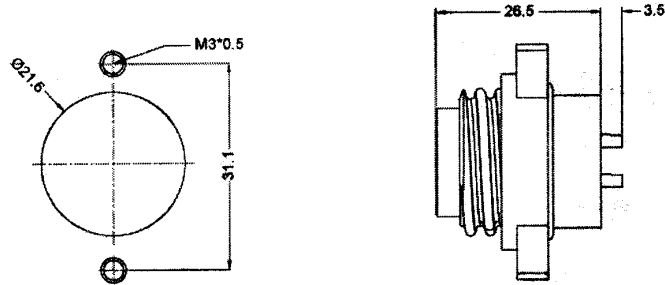

Pin Configurations

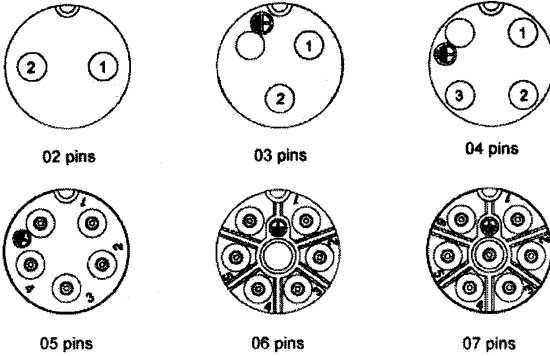

SPECIFICATIONS

Pins: Copper Alloy, 6μ gold plate
 Body: Glass filled Nylon, UL recognized
 Operating temp.: -40°C to +105°C

Mating Connectors



RoHS compliant

Series	Pins	Current Rating	Type	Style	Waterproof Rating
CPW	XX	8	FMM	SSC	7
Power connector	02-07	8=8A rating	Front mount male with male pins	Solder style with screw lock and circular backshell	7=IP67

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	8/10/99
				Checked	Lizzy	8/10/99
				Drawn	Tina	8/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CPW-XX-8-PMM-SSC-7**

Description: circular screw type panel mount power connector