


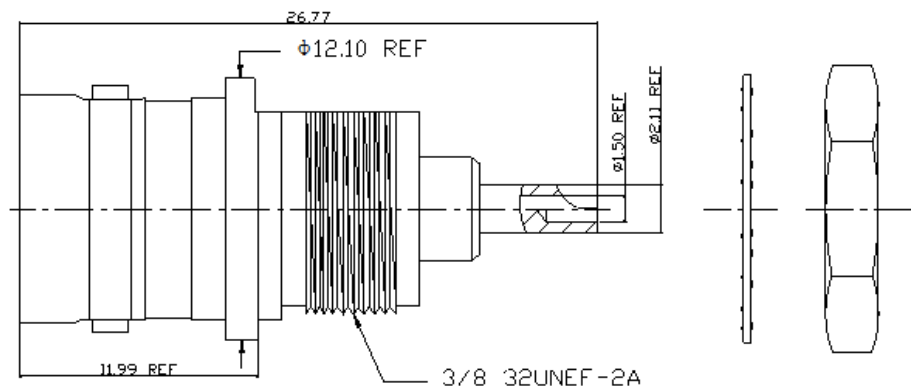

SPECIFICATIONS

Vibration:	MIL-STD-202
Impedance:	50Ω
Frequency Range:	DC 3GHz
Shell:	Brass, Nickel Plated
Socket:	Brass, Gold Plated
Insulator:	PTFE
VSWR:	≤ 1.2
Working Voltage:	500V max
Center Contact Resistance:	≤ 1.5mΩ
Outer Contact Resistance:	≤ 1mΩ
Insulation Resistance:	≥ 5000 MΩ
Withstanding Voltage:	1500V rms
Durability:	≥ 500 cycles
Temperature Range:	-55C to +155C

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date	 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919
				Approved	Howard	10/13/14	
				Checked	Lizzy	10/13/14	
				Drawn	Tina	10/13/14	
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°	Part No.: CRF-BNC-1221-TGBN-A
				UNIT: mm			Description: BNC Type 1221 Bulkhead Straight Receptacle