



Recommended mounting hole maximum panel thickness: 5.5mm

Recommended mounting torque: 12 inch-pounds max.

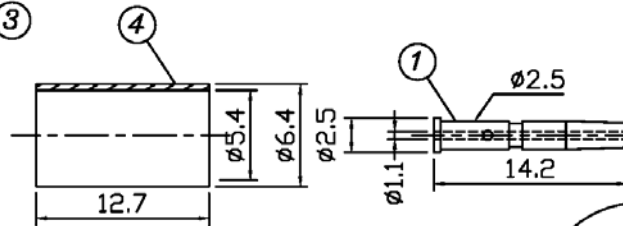


FERRULE

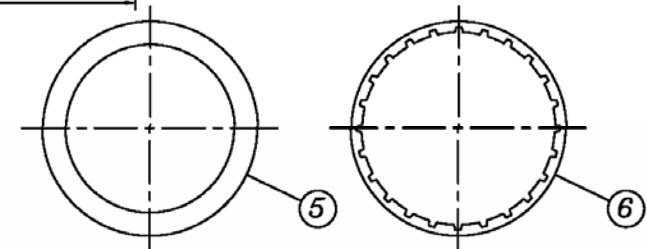

GASKET

LOCK WASHER

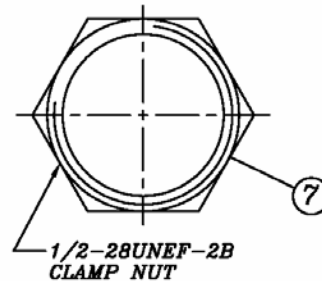


1/2-28UNEF-2B CLAMP NUT

| Item | Name | Material | Finish |
|------|----------------|-----------------|--------|
| 1 | Center contact | Brass | Gold |
| 2 | Body | Die cast zinc#3 | Nickel |
| 3 | Insulator | Delrin, UL94V-0 | |
| 4 | Ferrule | Brass | Nickel |
| 5 | Gasket | Rubber | |
| 6 | Washer | Phosphor bronze | Nickel |
| 7 | Nut | Brass | Nickel |

NC

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 08/10/99 |
| | | | | Checked | Lizzy | 08/10/99 |
| | | | | Drawn | Tina | 08/10/99 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |



Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRF-BNC-7023-02BNDG-R**

Description: BNC bulkhead crimp jack, 50 ohms

1

2

3

4

5

6

7

8

9