




CRIMPED FERRULE
Hex Crimp Size .178"
CRIMPED CONTACT PIN
Hex Crimp Size .068"
MAX PANEL THICKNESS
4.5mm




RECOMMENDED MOUNTING HOLE



RECOMMENDED CABLE STRIPPING DIM'S

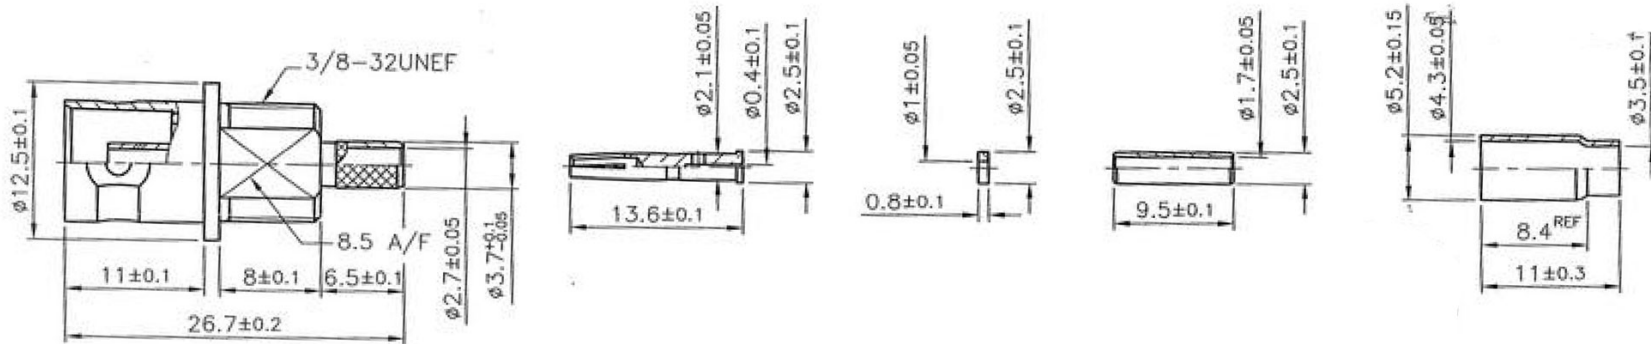

Item	Name	Material	Finish
1	Body	Brass Per QQ-B-626	Nickel PL 70 min Thick over Copper Strike
2	Insulator	Delrin	White
3	Lock Ring	Brass Per QQ-B-626	Nickel PL 70 min Thick over Copper Strike
4	Contact Pin	Brass Per QQ-B-626	Gold PL 3 Min Over Nickel PL 70 Min Thick Over Copper Strike
5	Spacer	Teflon MIL-P-19468	White
6	Spacer	Brass Per QQ-B-626	Nickel PL 70 min Thick over Copper Strike
7	Ferrule	Brass JIS H 3250, C 2700	Nickel PL 70 min Thick over Copper Strike
8	Washer	SS41	Nickel PL 70 min Thick over Copper Strike
9	Nut	Brass Per QQ-B-626	Nickel PL 70 min Thick over Copper Strike

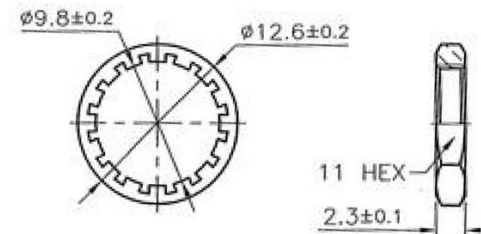

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/10/10
				Checked	Lizzy	02/10/10
				Drawn	Tina	02/10/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRF-BNC-7061AS-711CF001B7061**

Description: BNC Bulkhead Crimp Jack 75 Ohms