


SPECIFICATIONS

Current Rating: 6A AC/DC
 Voltage Rating: 125 V AC/DC
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ ohm Min.
 Withstanding: 500V AC/minute
 Protection Rating: IP67
 Housing: PBT, UL94V-0, Black
 Contact: Brass
 O-Ring: EPDM
 Nut: Brass
 Contact Finish: Gold over Nickel
 Nut Finish: 60u"~100u" Nickel Plating Overall
 Temperature Range: -40C ~ +85C

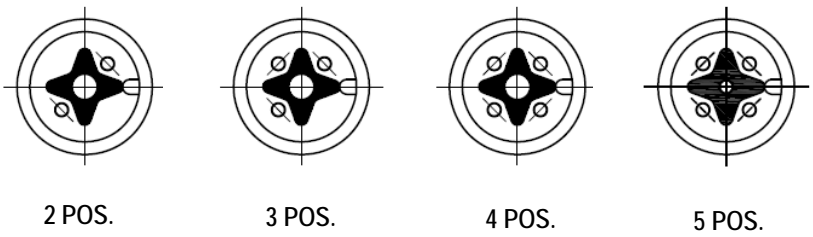

Series	Type	Style	Positions	Plating
CRF	M12	DT2620FD	0X	GD10
RF Connector	M12 Circular	DT2620FD style	02-05	10μ" Gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/27/12
				Checked	Lizzy	09/27/12
				Drawn	Tina	09/27/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRF-M12-DT2620FD-0X-GD10**

Description: M12 Cable Side Male Type 2-5 Pos Waterproof