



CRIMPED FERRULE  
Hex Crimp Size .100" (2.54mm)

SOLDER CONTACT PIN

MAX PANEL THICKNESS = 4mm




USER GUIDE  
(使用指導)





RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)




RECOMMENDED  
MOUNTING HOLE  
(建議架設孔)



M4xP0.5-6g

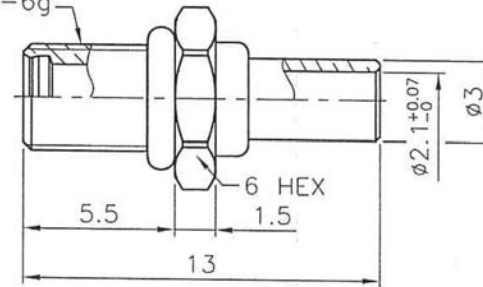

Item	Name	Material	Finish
1	Body	Brass	Gold over Copper
2	Insulator	Teflon	White
3	Braid Holder	Brass	Gold Over Nickel Over Copper
4	Gasket	Silicone	Red
5	Contact Pin	Beryllium Copper	Gold Over Nickel Over Copper
6	Spacer	Teflon	White
7	Spacer	Brass	Gold Over Nickel over Copper
8	Nut	Brass	Gold Over Nickel Over Copper

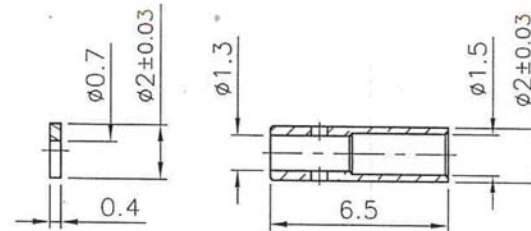

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/08/12
				Checked	Lizzy	03/08/12
				Drawn	Tina	03/08/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
440 Lincoln Blvd., Middlesex, New Jersey 08846  
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRF-MMCX-9761DS-534D001B**

Description: MMCX Bulkhead Crimp Jack (for 1.13mm, 1.32mm)