


SPECIFICATIONS

Pin Header: Brass, Tin Plated
 Housing: PA66, UL94V-0
 Voltage Rating: 300V
 Current Rating: 15A
 Contact Resistance: 20mΩ
 Insulation Resistance: 5000MΩ/1000V
 Withstanding Voltage: AC1500V/1min
 Temperature Range: -40C to +105C
 Max Soldering: +250C for 5 Seconds

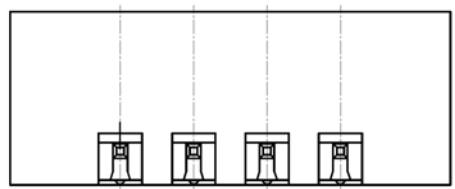

Series	Type	Pitch	Positions	Color
CMTB	FE050RF	XXX	XX	GN
Terminal blocks	R/A header with flanges	500=5.00mm 508=5.08mm 750=7.50mm 762=7.62mm	02-25	GN=Green

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	8/10/99
				Checked	Lizzy	8/10/99
				Drawn	Tina	8/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-FE050RF-XXX-XX-GN**

Description: terminal block right angle header with flanges