



SPECIFICATIONS

Impedance: 50 ohm
 Frequency range: 0-10 GHz
 VSWR: 1.3 max.
 Voltage rating: 250 V RMS
 Center contact resistance: 6 milliohms max.
 Outer contact resistance: 1 milliohms max.
 Insulator resistance: 1,000 megohms min.
 Withstanding: 750VAC for 1 min.

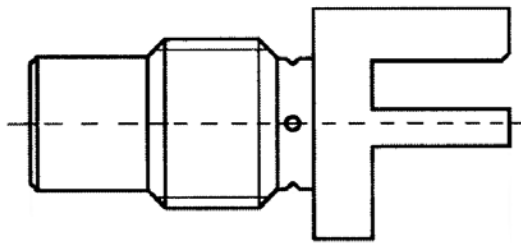

Name	Material	Finish
Body	Brass	3μ" gold
Center contact	Brass	30μ" gold
Insulator	Teflon	White

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/01
				Checked	Lizzy	08/10/01
				Drawn	Tina	08/10/01
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRF-SMC-6534-BGTG-A**

Description: End launch SMC jack, 50 ohm