



RECOMMENDED
CABLE STRIPPING DIM'S

Crimped Ferrule:
Hex Crimp Size .178"

Solder Contact Pin

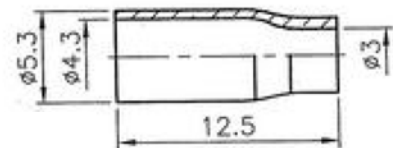

| Item | Name | Material | Finish |
|------|-------------|----------|------------------------------|
| 1 | Body | Brass | Nickel over Copper |
| 2 | Insulator | Teflon | White |
| 3 | Contact Pin | Brass | Gold over Nickel over Copper |
| 4 | Cube Body | Brass | Nickel over Copper |
| 5 | Washer | SS41 | Nickel over Copper |
| 6 | Washer | Delrin | Natural |
| 7 | C Ring | SS41 | Nickel over Copper |
| 8 | Gasket | Silicone | Red |
| 9 | Shell | Brass | Nickel over Copper |
| 10 | Nut | Brass | Nickel over Copper |
| 11 | Ferrule | Brass | Nickel over Copper |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 03/20/09 |
| | | | | Checked | Lizzy | 03/20/09 |
| | | | | Drawn | Tina | 03/20/09 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | | | UNIT: mm |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRF-TNC-7411NR-509BF000B**

Description: TNC R/A Crimp Plug
(For RG-174/U,188A/u,316/U)