

2.60 ± 0.10

4.60 ± 0.10

± 0.20

0.40 ± 0.03


0.46 ± 0.05

A = 1.27X(no. pos. - 1)
B = 1.27X(no. pos.)


SPECIFICATIONS


Current rating: 1 amp
 Contact material: Phosphor bronze
 Contact plating: Gold
 Contact resistance: 20 milliohms max.
 Insulator material: Polyester, UL94V-0
 Insulator resistance: 5,000 megohms min.
 Withstanding: 500VAC for 1 min.
 Operating temperature: -40°C to +105°C
 Processing temperature: 230°C for 30 sec. max.

Recommended P.C.Board
Hole Layout

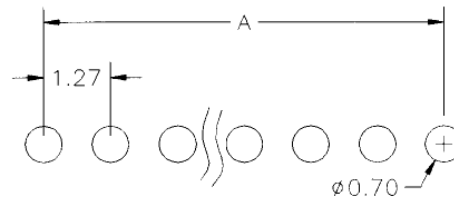

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-01-XX-X-XX**

Description: Receptacle strip, single row, 0.050" pitch