
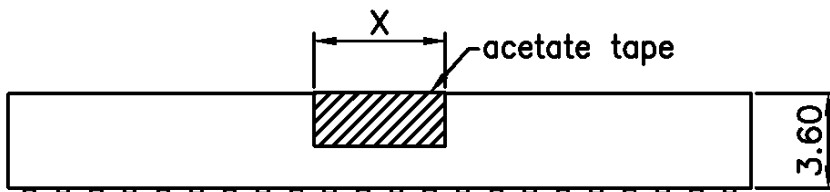


RECOMMENDED P.C.B LAYOUT



SPECIFICATIONS

Current rating:	1 amp
Contact material:	Phosphor bronze
Contact resistance:	20 milliohms max.
Insulation material:	Polyester (Nylon 6T), UL94V-0
Insulation resistance:	1,000 megohms min.
Withstanding:	300VAC/VDC for 1 min.
Temperature range:	-40°C to +105°C

RoHS compliant

Series	Rows	Profile	Contacts	Contact Length	Plating	Options
CRS	XXM	LP	XX	XX	XX	XX
Receptacle strip	01=Single row 02=Double row	LP=3.6mm	Single row 2-40 Double row 4-100	A=Standard	GD=Gold SG=Selective gold TN=Tin	SM=Surface mount SM1=Top left start SM2=Bottom left start

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-01M-LP-XX-A-XX-SM1**

Description: Female header, 1.27 pitch, single row, SMT type