



SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20m ohms max.
 Withstanding: AC 300V
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL94V-0 LCP
 Operating Temp: -40°C ~ +105°C

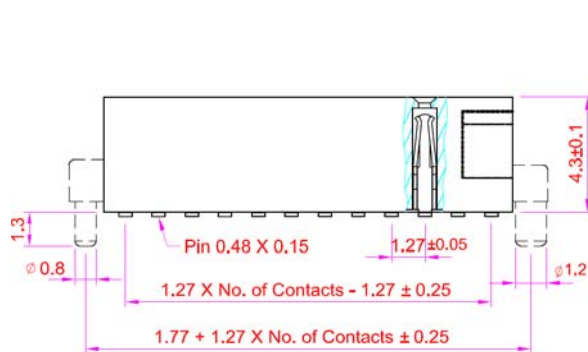

Series	Rows	Profile	Positions	Plating	Options	Package	CAP
CRS	XX	BELPA	XX	XX	XX	XX	XX
Receptacle Strip .050" (1.27mm) Pitch	01=Single 02=Dual	BELPA=4.5mm (D) Bottom Entry (std) BELPA2=4.8mm (Others available)	02-30 Single 04-60 Dual	TN=Tin SGXX=Selective Gold GDXX=Gold XX=flash if blank, 10,15,30u"	Blank=Through Hole SM=Surface Mount CP=Centering Post CPF=Outer CP P=Polarized	TR=Tape & Reel TB=Tube	Blank=None F=Film P=Plastic M=Metal

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/04/10
				Checked	Lizzy	06/04/10
				Drawn	Tina	06/04/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-02-BELPA-XX-XX-SM-CPF-P-XX-X**

Description: Receptacle strip, .050" pitch, bottom entry surface mount