




$$0.4 + 1.27 \times \text{No. of Positions} \pm 0.25$$



SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20m ohms max.
 Withstanding: AC 300V
 Operating Temp: -40C ~ 105C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL94V-0, LCP

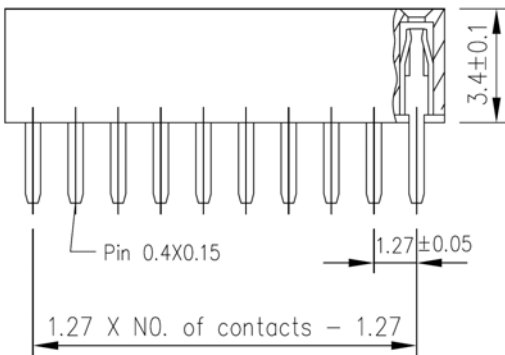

Series	Rows	Profile	Pos.	Pin Spacing	Plating
CRS	02	LP	XX	A	XX
Receptacle strip, 1.27mm pitch	02=Dual Row	3.4mm height	04-40	A=1.27mm	TN=Tin SGXX=Duplex GDXX=Gold XX=Flash if blank, 10,15,30u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/20/07
				Checked	Lizzy	07/20/07
				Drawn	Tina	07/20/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-02-LP-XX-A-XX**

Description: Female Header P1.27mm, Dual Row, Straight Type