
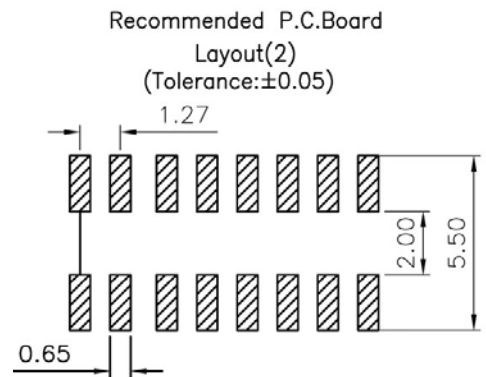


SPECIFICATIONS
 Current rating: 1 amp
 Contact material: Phosphor bronze
 Contact plating: Gold, tin or duplex
 Contact resistance: 20 milliohms max.
 Insulation Material: Polyester, UL94V-0
 Insulation resistance: 1,000 megohms min.
 Withstanding: 300VAC for 1 min.
 Operating temperature: -40°C to +105°C
 Processing temperature: 230°C for 30-60 sec. max.
 260°C for 10 sec. max.

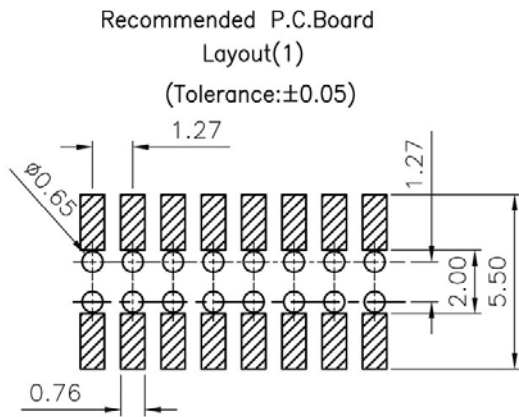

Series	Rows	Profile	Pos.	Contacts (D)	Plating	Options
CRS	02	LPD	XX	B	XX	XX
Receptacle strip, 1.27mm pitch	02=Dual row	2mm height	04-40	A=4.2 (std) B=4.5 C=4.8 D=5.0	TN=Tin SGXX=Duplex GDXX=Gold XX=Flash if blank, 3, 5, 10, 15µ"	SM=Surface mount CP=Centering pin PPL=Pick cap PPF=Pick film TR=Tape and reel

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/22/06
				Checked	Lizzy	08/22/06
				Drawn	Tina	08/22/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CRS-02-LPD-XX-B-XX-SM-PPF**

Description: 1.27 Female Header Dual Row SMT Type